

# CLASSIC®



*Perfect answer for space optimization in multifunctional rooms, cultural centers, schools... The CLASSIC® Movable Wall is a sure bet : durable, reliable, and functional.*

## PRINCIPLE

Custom-made acoustic movable wall system. Sliding panels in a top track without any floor guidance.

## ACOUSTIC

The CLASSIC® offers an acoustic reduction Rw of 49 dB.

## SILENT AND EASY TO MOVE

ALGAFLEX® assures an exclusive system: Polymer-coated, self-lubricating, wear-resistant ball bearing trolleys (Delrin).

## TECHNICAL RELIABILITY

Our CLASSIC® walls have undergone the most rigorous endurance and mechanical resistance tests, in a specific lab or in ALGAFLEX's own Test Center. 5-year parts and labor warranty.

## IMPLEMENTATION

Panels can be fixed by a central suspension (MONODIRECTIONAL) composed of 4 self-lubricating and highly resistant polymer rollers ensuring a smooth and silent movement without friction.

Panels can also be fixed by 2 trolleys (MULTIDIRECTIONAL) with self-lubricating polymer rollers with double direction of rotation ensuring smooth and silent movement without friction.

For mono panels greater than 4 500mm ask for technical advice, please consult us for study.

## QUICK TO INSTALL

Top and bottom telescopic seals are locked in place with just 1/3 of a turn of a removable handle.


## FACE FINISHING

- Range Melamine Laminate ALGAFLEX
- Range Laminate PRINT colours
- Oberflex
- Laminate all brands.

## OPTIONS

- Lacquering profile
- Oculus.

## JOINING PANELS

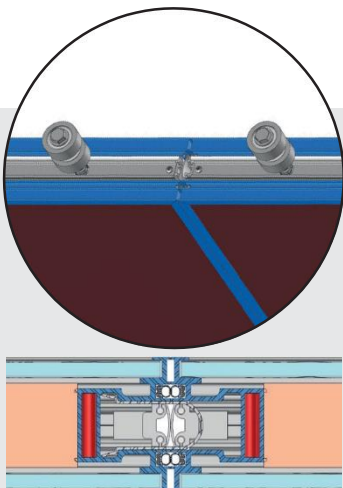

	Panel Maximum Width	Custom made according to finishing
	Weight starting from *	PS 48 Kg /m <sup>2</sup>
	Panel Maximum Height	6 000 mm
	Sound Reduction	Rw 49 dB / Ra 46 dB
	Thickness	100 mm
	Fire Reaction	Meets standard AM14

\* Weight for panels of 3000 x 1200 mm

\* Depending on the specificities of the project, our design office will adapt the measurements.